


PT2 Maintenance Features

Timely and thorough maintenance of a cooling tower is essential for long life and trouble free operation. The PT2 Cooling Tower offers a number of unique standard and optional features, not available from other induced draft counterflow cooling tower manufacturers, making the PT2 the easiest to maintain in this product category.


- The BranchLok™ System allows fast removal of spray branches without tools for easy cleaning.
- All belt-drive PT2 models have externally accessible motor adjusters with a built in locking wrench for easy motor alignment and belt tensioning.
- The external spray header cleanout port allows flushing of any debris from the spray header to the outside of the unit without having to remove the spray branches.
- An inward sliding access door provides safe and easy access to the water distribution and fan drive systems.
- Optional removable fill inspection panels allow for easy inspection and access to the fill.
- An optional motor removal davit allows for quick and easy motor removal. The davit can be easily moved from cell to cell as it simply slides and locks into socket.

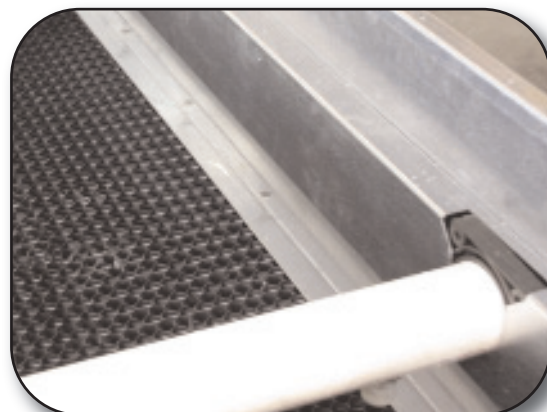

BranchLok™ System



External Motor Adjustor

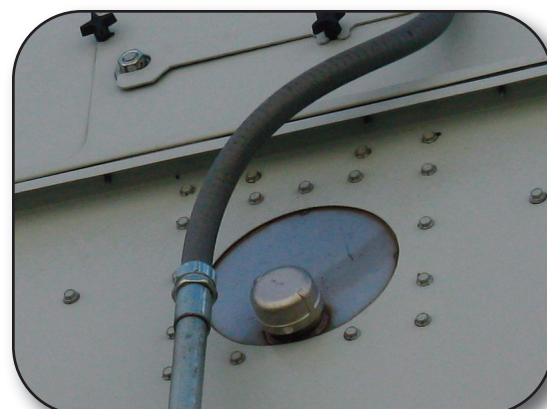

External Spray Header Cleanout Port



誥鑫企業有限公司
ARITH COMPANY LTD.

地址：台北市105復興北路427巷30號
電話：(02) 2717-5038 (代表號)
傳真：(02) 2717-5039
郵件：taipei@arith.com.tw
網址：http://www.arith.com.tw



Baltimore Aircoil Company