

Standard functions

Applications

- Generator protection for hydro turbine driven generators

Functions

- 2 sets of alarm set points
- Alarm inhibit, automatic
- Horn relay
- Language selection
- kWh/kVArh outputs

Protections (ANSI)

- Reverse power (32)
- Overcurrent, 2 levels (51)
- Overcurrent, inverse, 1 level (51)

Display

- Separate mounting
- Easy to read
- Password-protected setup
- Configurable views
- Alarm list
- Event log (150 events)

Measuring system

- 3-phase true RMS
- Galvanically isolated voltage and current inputs
- -/1 or -/5A AC
- 100-25000V AC

GSM communication

- SMS messages at all alarms
- Dial up from PC utility software to control unit

Approvals

- Netmanagement
- TÜV Nord
- GOST-R
- UL

© DEIF A/S



誥鑫企業有限公司
ARITH COMPANY LTD.
 地址：台北市復興北路427巷30號
 電話：(02)2717-5038
 傳真：(02)2717-5039
 e-mail: taipei@arith.com.tw
 網址: http://www.arith.com.tw

Application

The GPU Hydro generator protection unit is a compact microprocessor-based protection unit containing all functions necessary to protect a hydro turbine driven synchronous/asynchronous generator. It contains all necessary galvanically separated 3-phase measuring circuits.



Netmanagement and TÜV software must be specified upon ordering.

Display unit

The display unit is separate and can be installed directly on the main unit or in the front of the switchboard door (requires option J# - display cable).

The display unit shows all measured and calculated values as well as alarms and data from the event log.

The displayed values can be configured freely in order to match the customer or application specific requirements.

Self-test

The GPU Hydro automatically carries out a cyclical self-test at start-up. If any errors are found, they will be displayed in clear text in the display and indicated with a relay output.

Setup

Setup is easily done via a menu structure in the display (password-protected) or via the RS232 PC connection and the multi-line 2 Windows® based PC utility software. The PC utility software can be downloaded free of charge from www.deif.com. The utility software offers additional features such as monitoring of all relevant information during commissioning, saving and downloading of settings and downloading of software updates.

Options

In order to perfectly match the product solution to specific applications, the functionality of the GPU Hydro can be equipped with a number of available options. The options selected by the customer will be integrated in the standard GPU Hydro, thus securing the same user interface unaffected by whether the application needs a highly complex or a more basic generator controller.

Synchronising option

The GPU Hydro can be used for synchronising a circuit breaker. The speed and voltage set point is controlled by the GPU Hydro through relay outputs.

The GPU Hydro is only used as synchroniser. After the synchronising, the regulation is switched off but the protection is still active.



AVR control requires option D2.

Approvals


The GPU Hydro is approved by the following societies and companies:

Land	Other
	GOST-R
Netmanagement	UL
TÜV Nord	




Please refer to www.deif.com for details and certificates.


Principle diagram

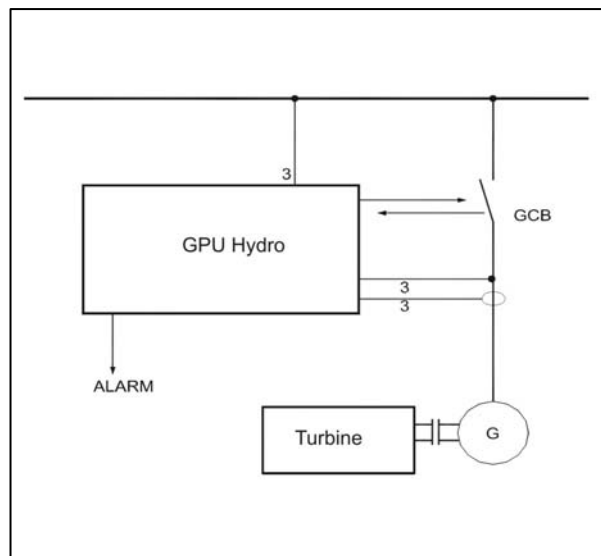

Single line application diagrams

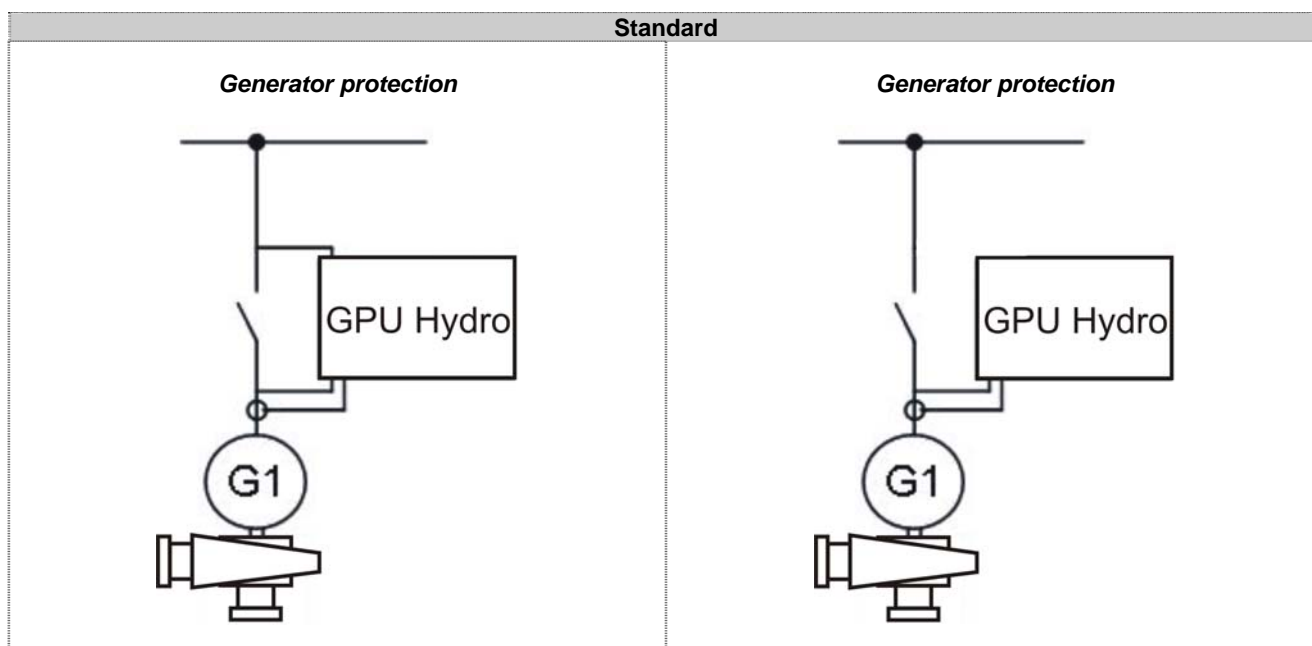

Overcurrent and reverse power alarms are standard.

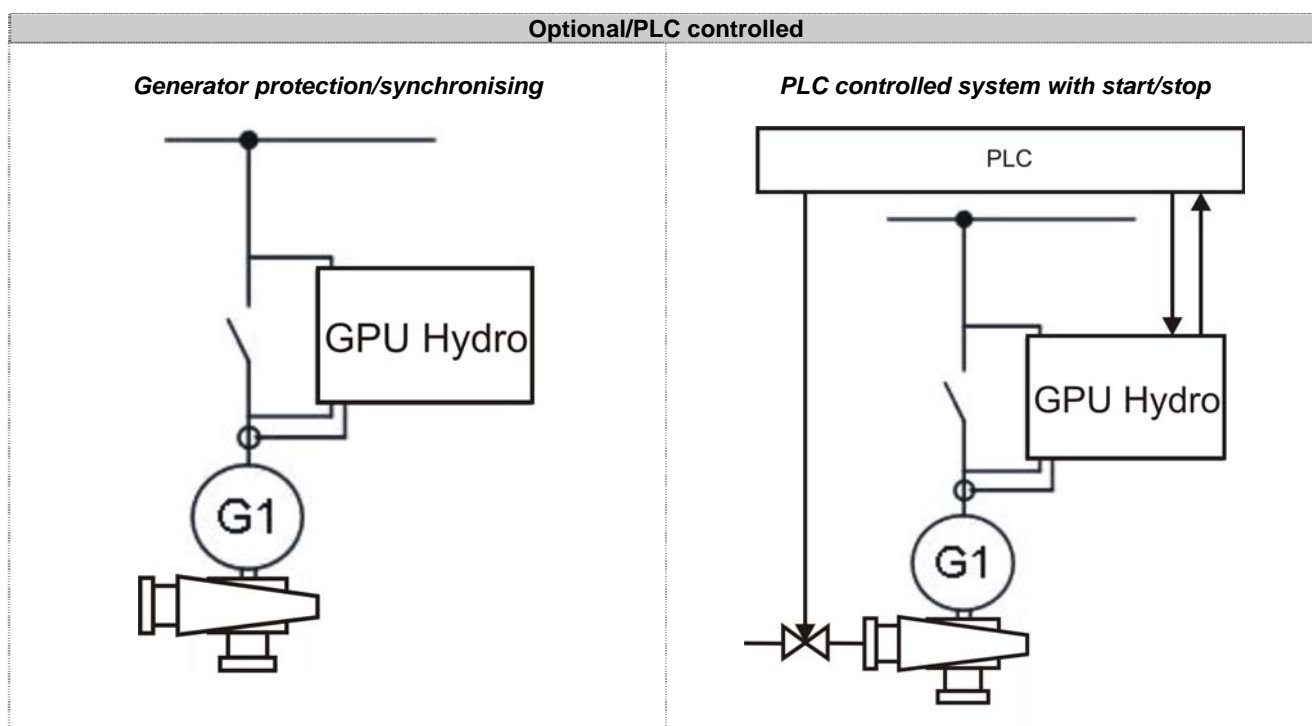

The GPU Hydro can be used in simple or complex applications. The above shows very simple applications only.

Available options



Please notice that not all options can be selected for the same unit. Please refer to page 5 in this data sheet for further information about the location of the options in the unit.

Option	Description	Type	Note
A	Loss of mains protection package		
A1	Over- and undervoltage (generator and busbar/mains) (27/59) Over- and underfrequency (generator and busbar/mains) (81) Vector jump (78) df/dt (ROCOF) (81)	Software option	
A2	Over- and undervoltage (generator and busbar/mains) (27/59) Over- and underfrequency (generator and busbar/mains) (81) df/dt (ROCOF) (81)	Software option	
A3	Over- and undervoltage (generator and busbar/mains) (27/59) Over- and underfrequency (generator and busbar/mains) (81) Vector jump (78)	Software option	
B	Generator/busbar/mains protection package		
B1	Over- and undervoltage (generator and busbar/mains) (27/59) Over- and underfrequency (generator and busbar/mains) (81)	Software option	
C	Generator add-on protection package		
C1	Over- and undervoltage (generator) (27/59) Over- and underfrequency (generator) (81) Overload (32) Fast overcurrent (<42 ms, 350%, 2 levels) (50) Current unbalance (46) Voltage asymmetry (47) Reactive power import (excitation loss) (40) Reactive power export (overexcitation) (40)	Software option	
C2	Negative sequence voltage high (47) Negative sequence current high (46) Zero sequence voltage high (59) Zero sequence current high (50)	Software option	
D	Voltage control		
D2	Constant voltage control (stand-alone)	Software option	Requires option G2
F	Analogue transducer outputs		
F1	2 transducer outputs, 0-20mA or 4-20mA	Hardware option	Refer to page 5
F2	4 transducer outputs, 0-20mA or 4-20mA	Hardware option	Refer to page 5
G	Start/stop/synchronisation outputs		
G2	Synchronisation with relay speed governor outputs	Hardware option	Refer to page 5
H	Serial communication		
H1	CAN-open	Hardware option	Refer to page 5
H2	Modbus RTU	Hardware option	Refer to page 5
H3	Profibus DP	Hardware option	Refer to page 5
J	Cables		
J1	Display cable with plugs, 3 m. UL94 (V1) approved	Other	
J2	Display cable with plugs, 6 m. UL94 (V1) approved	Other	
J3	PC cable for utility software (RS232). UL94 (V1) approved	Other	
J6	Display cable with plugs, 1 m. UL94 (V1) approved	Other	
K	Documentation		
K1	Designer's Reference Handbook (hard copy)	Other	
K2	CD-ROM with complete documentation	Other	
L	Display gasket for IP54	Other	Standard is IP52
M	Configurable engine control cards		
M1	Turbine control card with PT100 sensor inputs 4 x 4-20mA inputs 2 x PT100 inputs 1 x tachometer input (magnetic pick-up) 5 x binary inputs 3 x relay outputs	Hardware option	Refer to page 5 Start/stop logic can be switched ON/OFF
M	Configurable I/O extension cards		
M13	7 binary inputs, configurable	Hardware option	Refer to page 5
M14	4 relay outputs	Hardware option	Refer to page 5
M15	4 analogue inputs, configurable, 4-20mA	Hardware option	Refer to page 5


(ANSI# as per IEEE Std C37.2-1996 (R2001) in parenthesis).

Hardware overview



Each slot can hold no more than one hardware option. For instance, it is not possible to select option H2 and option H3 at the same time because both options require a PCB in slot #2.


Apart from the hardware options shown on this page, it is possible to select the software options mentioned on page 4 in this data sheet. Options A, B, C and D are software options.

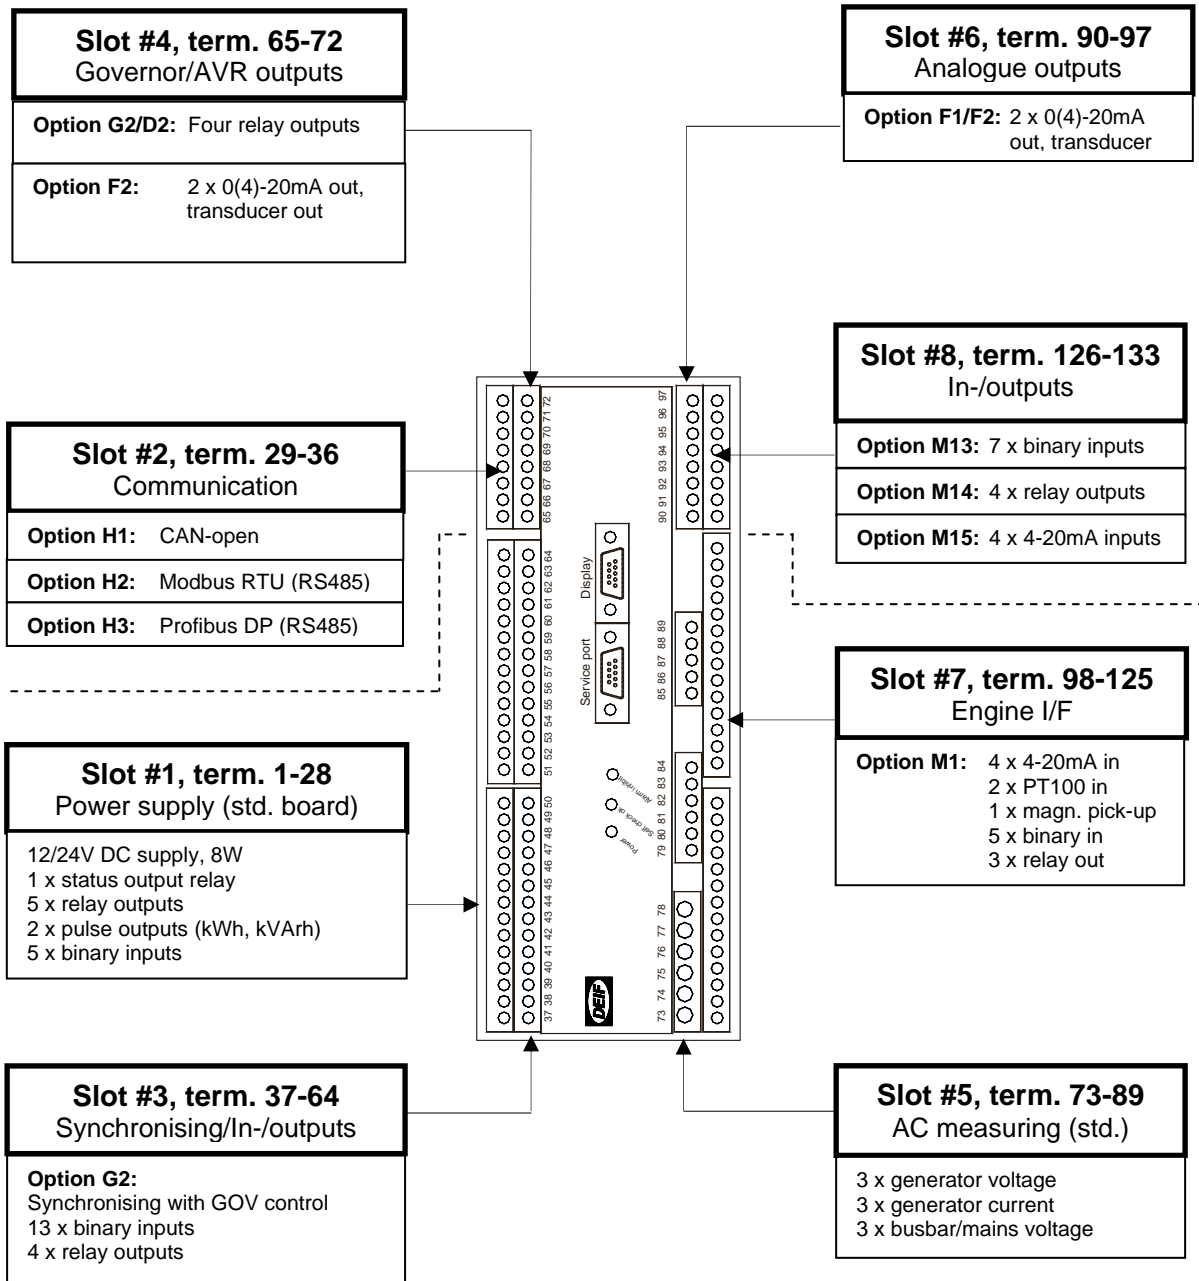


Technical specifications

Accuracy:	Class 1.0 Class 2.0 for neg. seq. current (To IEC 688)	Analogue outputs:	0(4)-20mA Galvanically separated Active output (internal supply) Load max. 500Ω
Operating temp.:	-25-70°C (-13-158°F)	Safety:	To EN 61010-1, installation category (overvoltage category) III, 600V, pollution degree 2
Galvanic separation:	Between AC voltage, AC current and other I/Os: 3250V AC, 50Hz, 1 min. Between analogue outputs: 500V DC, 1 min.	Protection:	Unit: IP20 Display: IP52 (IP54 with gasket: Option L) To IEC 529 and EN 60529
Meas. voltage:	100-690V AC +/-20%	EMC/CE:	To EN 50081-1/2, EN 50082-1/2 SS4631503 (PL4) and IEC 255-3
Consumption:	Max. 0.25VA/phase	Material:	All plastic materials are self-extinguishing according to UL94 (V1)
Meas. current:	-/1 or -/5A AC	Plug connections:	AC current: 4.0 mm ² multi stranded Other: 2.5 mm ² multi stranded Display: 9-pole Sub-D female PC: 9-pole Sub-D male
Consumption:	Max. 0.3VA/phase	Open collector outputs:	Supply 8-36V DC, max. 10mA
Current overload:	4 x I _n continuously 20 x I _n , 10 sec. (max. 75A) 80 x I _n , 1 sec. (max. 300A)	Weight:	Main unit: 1.6 kg (3.5 lbs.) Option J1/J3: 0.2 kg (0.4 lbs.) Option J2: 0.4 kg (0.9 lbs.)
Meas. frequency:	30-70Hz	Approval:	UL 508
Aux. supply:	12/24V DC (8-36V continuously, 6V 1 sec.) Max. 8W consumption Recommended power supply is DEIF's DCP-2	Response times:	
Binary inputs:	Optocoupler, bi-directional ON: Input voltage 8-36V DC Impedance typically 4.7kΩ OFF: <2V DC	<i>Busbar 1 and 2:</i>	Over-/undervoltage <50 ms Over-/underfrequency <50 ms
Relay outputs:	250V AC/24V DC, 8A (Unit status output: 1A)	<i>Generator:</i>	Over-/undervoltage 70-300 ms Over-/underfrequency 70-300 ms Current: 100-300 ms Rocof: 100 ms (4 periods) Vector jump: 30 ms Fast overcurrent: <42 ms
Analogue inputs:	4-20mA: Impedance max. 50Ω, not galvanically separated PT100: According to EN/IEC 60751 + A2		
Mounting:	DIN-rail mount or base mount with 6 screws (Base mounting in marine applications)		
Climate:	Class HSE, to DIN 40040		

Unit dimensions in mm (inches)

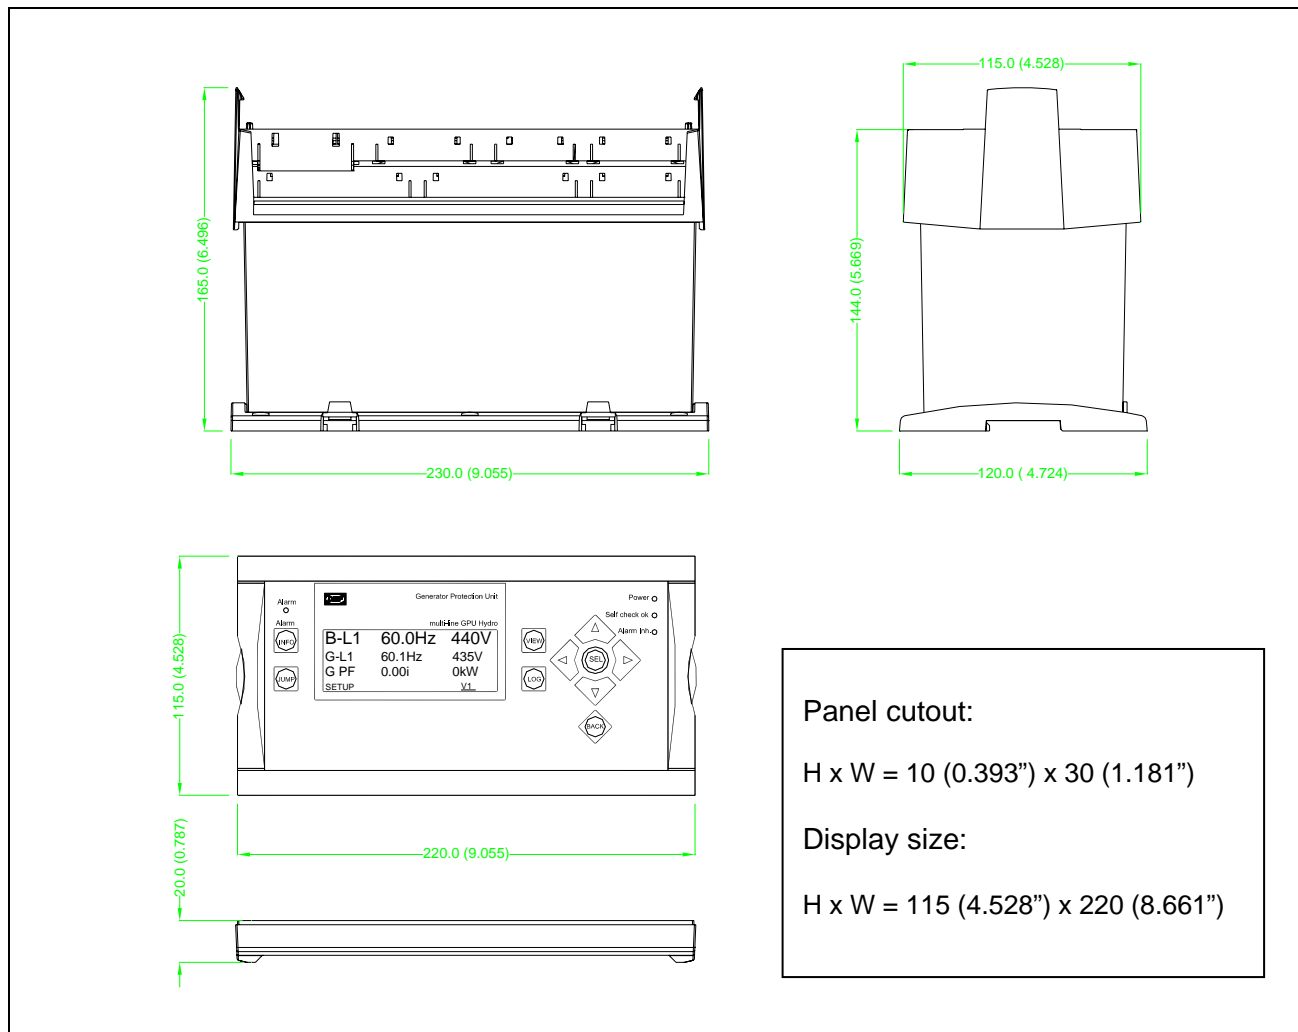

Order specifications

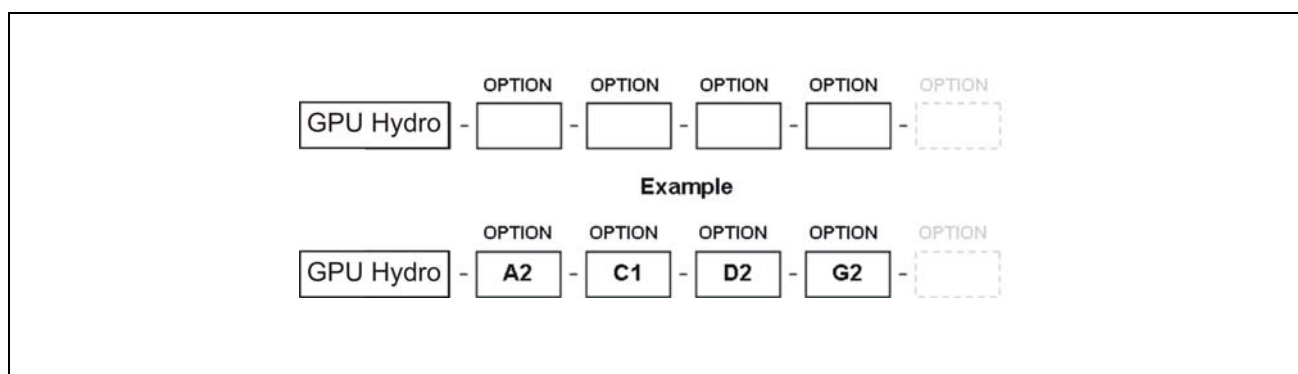

Due to our continuous development we reserve the right to supply equipment which may vary from the described.



DEIF A/S



誥鑫企業有限公司
ARITH COMPANY LTD.
 地址：台北市復興北路427巷30號
 電話：(02)2717-5038
 傳真：(02)2717-5039
 e-mail: taipei@arith.com.tw
 網址： <http://www.arith.com.tw>