

KORFUND DYNAMICS



...a solution for
every isolation problem

Series CE/CESS

Steel Spring Vibration Isolators

Features/Benefits


- Effective Vibration Control
- Loads up to 10,500 lbs.
- Static Deflections up to 1.36"
- Available with, or without adjustable snubbing
- Rugged cast-iron housing
- Quickly and easily installed

Applications


- Stationary Equipment
- HVAC Equipment
- Compressors, Pumps
- Motor Generator Sets
- Fans, Blowers

Korfund Series CE/CESS Spring Isolators are available in 4 sizes for loads up to 10,500 lbs., and static deflections up to 1.36". See Load/Deflection tables for actual ratings. Cast-iron housings are shop primed with a rust inhibitor primer. All nuts and bolts are electro zinc plated, and coil springs are powder coated and color coded for easy identification.


Optional: Series CESS-1 and CESS-2 Isolators are furnished with adjustable horizontal snubbing devices to control oscillation and withstand lateral forces. (Not available on CE-4 or CE-7). All dimensions, loads, deflections, are the same as CE-1 and CE-2 un-snubbed mounts.

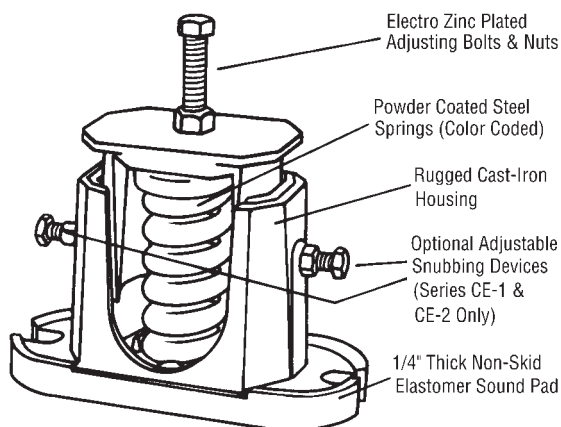

CE-1

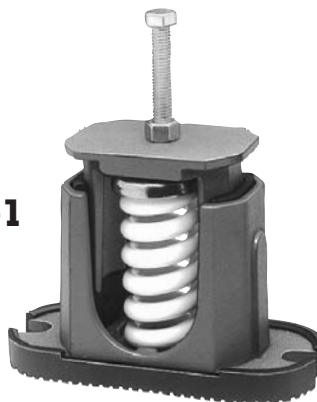

CE-2

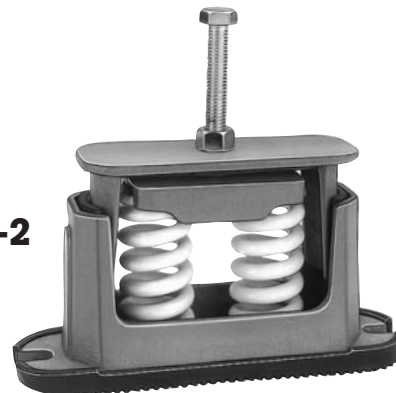

CE-4



CE-7

