

AVC63-4A VOLTAGE REGULATOR



誥鑫企業有限公司
ARITH COMPANY LTD.

地 址：台北市復興北路427巷30號
電 話：(02)2717-5038
傳 真：(02)2717-5039
e-mail: taipei@arith.com.tw
網 址： <http://www.arith.com.tw>

Using enhanced technology, the AVC63-4A full wave voltage regulator is designed for use on 50/60 Hz brushless generators. This encapsulated regulator is small in size, ruggedly constructed, and incorporates solid state technology with frequency compensation, automatic voltage build-up, overexcitation shutdown, and EMI filtering as standard.

FEATURES

- Integrated circuitry for compact size, simplicity, high reliability.
- Extremely rugged.
- Exciter field current 4A continuous, 7A forcing.
- Regulation accuracy better than $\pm 1.0\%$ no load to full load.
- Fast response.
- Frequency compensation.
- Overexcitation shutdown.
- EMI suppression.
- Available from stock.
- Gost R certified #POCC US.ME05.B03392.

ADDITIONAL INFORMATION

INSTRUCTION MANUAL

Request Publication 9285800991

**DESCRIPTION and
SPECIFICATIONS**
Pages 2 and 3

INTERCONNECT
Page 3

DIMENSIONS
Page 4

B Basler Electric

P. O. BOX 269 HIGHLAND, ILLINOIS 62249, U.S.A. PHONE 618-654-2341 FAX 618-654-2351

SVD-3
8-05

DESCRIPTION

The AVC63-4A model voltage regulator maintains generator line voltage on brushless generators from 5 kW to over 100 kW in size. The voltage regulator senses generator average voltage to maintain a precise regulation band within ± 1 percent. This is accomplished by converting a 120 VAC single phase power input to a controlled DC signal to the generator’s exciter field. The solid-state voltage build-up circuit will enable automatic generator line voltage build-up with a voltage input to the regulator of at least 6 VAC. Customer accessible stability, underfrequency and range adjusts enable fine tuning of the voltage regulator to the generator in use.

The over-excitation feature assists in protecting the voltage regulator during an over-excitation fault condition. During this mode, a shutdown signal is sent to the power stage, turning the regulator off. This feature will reset when the voltage input is removed (less than 6 VAC for a minimum of 2 seconds) to the regulator. Figure 1 demonstrates the underfrequency characteristics of the voltage regulator during prime mover low speed conditions. Customer curve selection matches the voltage regulator to 50 or 60 Hz systems.

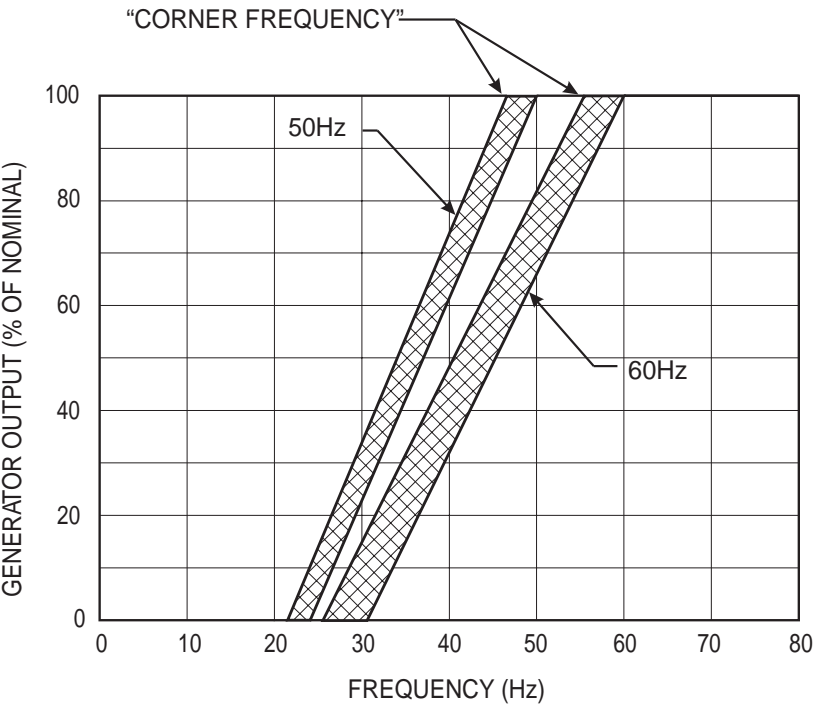


Figure 1 - Frequency Compensation Characteristic

SPECIFICATIONS

DC OUTPUT				EXCITER FIELD RESISTANCE		POWER INPUT		SENSING INPUT
MAX. CONT.		MAX FORCING 1 MIN (120 Vac INPUT)		MIN. OHMS @ 25°C	MAX OHMS	SINGLE PHASE VOLTAGE RANGE	BURDEN	VOLTAGE ADJUST RANGE
AMP	VOLT	AMP	VOLT					
4	63	7	100	15	100	95-139Vac ±10%	450VA	95-139Vac 190-277Vac

SPECIFICATIONS (continued)

DC OUTPUT POWER: 4 Adc at 63 Vdc maximum continuous, 7 Adc at 100 Vdc one minute forcing. (Forcing with 120 Vac nominal input).

EXCITER FIELD DC RESISTANCE: 15 ohms minimum; 100 ohms maximum.

AC POWER INPUT: Operating range: 95-139 Vac single phase, 50/60 Hz $\pm 10\%$. Burden 450VA.

SENSING INPUT: 95-139 Vac single phase, 50/60 Hz $\pm 10\%$, or 190-277 Vac single phase, 50/60Hz $\pm 10\%$.

VOLTAGE ADJUST RANGE: 190-277 Vac.

REGULATION ACCURACY: Better than $\pm 1.0\%$ no load to full load.

RESPONSE TIME: Less than 1.5 cycles for $\pm 5\%$ change in sensing voltage.

EMI SUPPRESSION: Internal electromagnetic interference filtering.

OVEREXCITATION SHUTDOWN: Field voltage shuts down after time delay if exciter field voltage exceeds 95 Vdc $\pm 5\%$. The time delay is inversely proportional to the

magnitude of the detected overvoltage condition up to the 140 Vdc point, thus allowing nominal forcing for approximately 1 minute. Beyond 140 Vdc, the field voltage is removed within 2.0 seconds.

VOLTAGE BUILDUP: Internal provisions for automatic voltage buildup from generator residual voltages as low as 6 Vac.

TERMINATIONS: 1/4 "Fast-On" Terminals.

POWER DISSIPATION: 15 Watts maximum.

OPERATING TEMPERATURE: -40°C (-40°F) to 60°C (140°F).

STORAGE TEMPERATURE: -40°C (-40°F) to 85°C (185°F).

VIBRATION: Withstands 1.2 Gs at 5 to 26 Hz; 0.036" double amplitude at 27 to 52 Hz; and 5 Gs at 53 to 1000 Hz.

SHOCK: Withstands up to 20 Gs in each of three mutually perpendicular axes.

WEIGHT: 10 oz. (0.28 kg) Net.


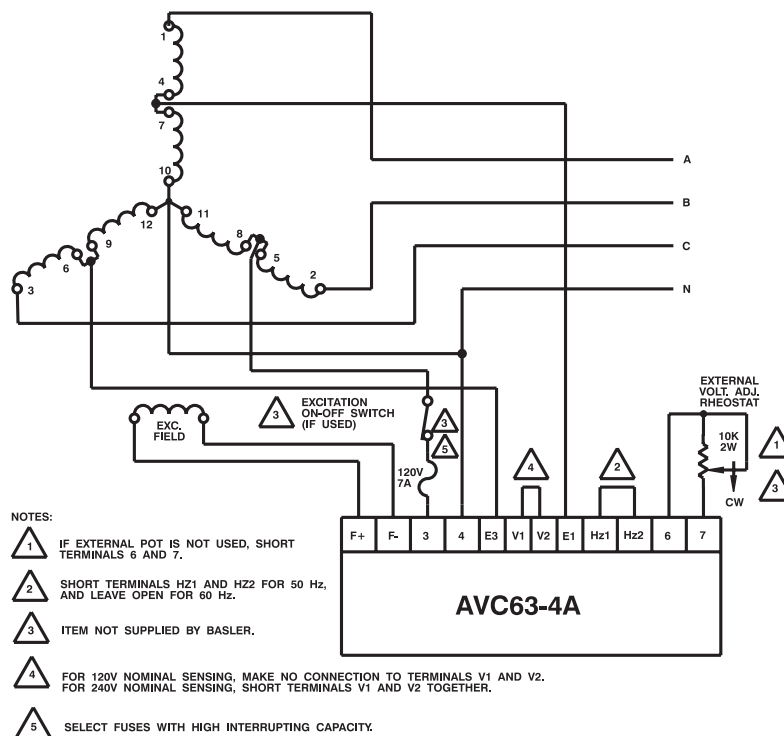


Figure 2 - Typical Interconnection Diagram
277/480V Nominal, 3-Phase, 4-Wire, Wye Connection

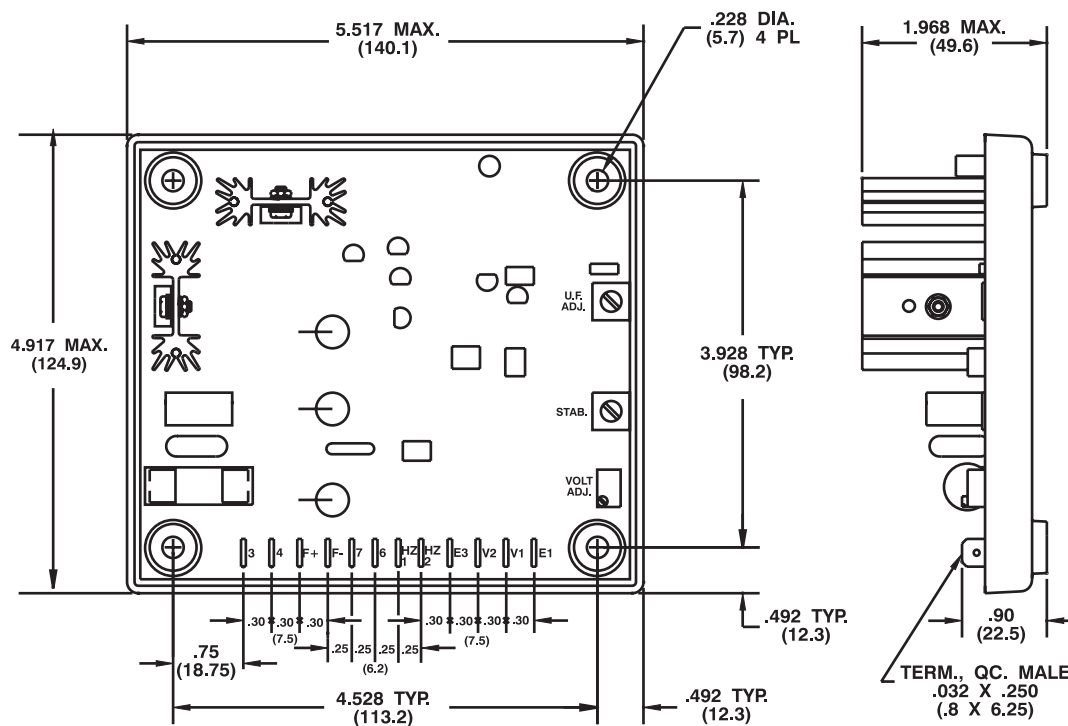

NOTE: All dimensions are in inches (millimeters).

Figure 3 - Outline Drawing

NOTES:

1. Dimensions in parentheses are in millimeters.
2. All drawings and data subject to change without notice.



P.A.E. Les Pins, 67319 Wasselonne Cedex FRANCE
Tel +33 3.88.87.1010 Fax +33 3.88.87.0808
e-mail: beifrance@basler.com

Route 143, Box 269, Highland, Illinois U.S.A. 62249
Tel +1 618.654.2341 Fax +1 618.654.2351
e-mail: info@basler.com

No. 1300 North Zhongshan Road, Wujiang Economic Development Zone
Suzhou, Jiangsu Province - P.R.China 215200
Tel +86(0)512 6346 1730 Fax +86(0)512 6346 1760
e-mail: beichina@basler.com

www.basler.com

Printed in U.S.A.