

BE3-27, BE3-59, BE3-27/59 AC VOLTAGE RELAYS

APPLICATION:




BE3 ac voltage relays provide voltage monitoring and protection in both single and 3 phase systems. This relay can be used in applications such as utility mains failure, regulation of power supplies, and protection of voltage sensitive equipment. Undervoltage, overvoltage and combined under/overvoltage units are available. BE3 ac relays operate when the externally adjustable trip point is reached. An external reset control is provided with adjustment from 1 to 15%. Reset ensures that the parameter being measured returns to percent set above or below the trip point before the relay returns to its original state. On overvoltage units, the relay energizes when the input signal exceeds the trip point. On undervoltage units, the relay de-energizes when the input signal goes below the trip point. A red LED indicates the state of the relay, and a green LED indicates the condition of the power supply.



誥鑫企業有限公司
ARITH COMPANY LTD.

地 址：台北市復興北路427巷30號
電 話：(02)2717-5038
傳 真：(02)2717-5039
e-mail: taipei@arith.com.tw
網 址： <http://www.arith.com.tw>

CASE CONNECTIONS:

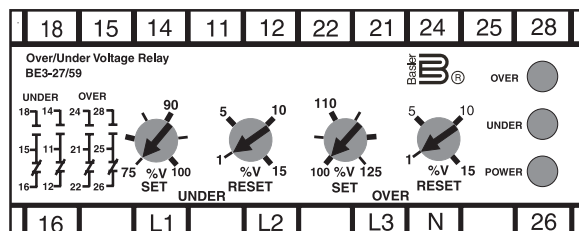

GENERAL SPECIFICATIONS:

Input

Nominal line to line voltage:
120V, 240V, 380V, 480V
Other nominal voltages: Contact the factory
Frequency: 50/60 or 400Hz
Burden: Less than 2.5VA per phase
single units, less than 3VA per
phase combined units
Overload: 1.5 times nominal voltage
continuous, 2 times nominal
voltage for 3 seconds

All units self-powered.

Set point

Range undervoltage: Adjustable 75% to 100%
of nominal
Range overvoltage: Adjustable 100% to 125%
of nominal
Reset: Adjustable 1 to 15%
Repeatability: Better than 0.5% of full span
Operating time: 200ms, typical

Weight and Case Size

Single function: 0.88 lbs. (0.4kg),
2.17 in. wide (55mm)
Combined function: 1.32 lbs. (0.6kg),
3.93 in. wide (100mm)

B Basler Electric

ROUTE 143, BOX 269 HIGHLAND, ILLINOIS 62249, U.S.A. PHONE 618-654-2341 FAX 618-654-2351

ULB-3
8-07

PERFORMANCE SPECIFICATIONS:

Environmental

Operating temperature: 0°C to 60°C (32°F to 140°F)
 Functional temperature: -25°C to 70°C (-13°F to 158°F)
 Storage temperature: -40°C to 70°C (-40°F to 158°F)
 Temperature coefficient: 0.03% per °C (200ppm/°C)
 Relative humidity: 95% noncondensing

Agency Approvals

cULus listed to UL 508 and CSA C22.2 No. 14
 CE compliant
 Gost R certified #POCC US.ME05.B03391

Insulation

Test voltage: 4kV RMS 50Hz 1min between
 Input, Case, and Auxiliary
 Impulse test: EMC 5kV transient, complies
 with IEC 801, EN 55020
 HF interference test: EHF 2.5kV 1MHz, complies
 with IEC 255-4
 Protection class: II, complies with IEC 348

Applied Standards

General: IEC 144, BS 5420,
 VDE/VDI 0435, IEC 947,
 EN 60947
 Safety: BS EN 61010, DIN 57411,
 VDE 0411, ANSI C37
 Surge withstand: IEC 801, EN 55020,
 ANSI C37-90a
 RFI: RFI degree N, complies with
 VDE 0875

Relay Output

Relay type: D.P.D.T.
 AC Rating: 250V, 5A, nonresistive, 1200VA
 DC Rating: 125V, 1A, resistive, 120 watts
 Mechanical Life: 5 million operations

Enclosure


Mounting: Snap onto DIN rail 1.38in. x
 .29in. (35mmx7.5mm), com-
 plies with DIN-EN 50022,
 BS 5584
 Any position
 Enclosure code: Case IP 50, terminals IP 30
 Material: Complies with UL 94 VO

HOW TO ORDER:

Designate the Model Number followed by the complete Style Number.

Complete the Style Number by selecting one feature from each column of the Style Identification Chart and entering its designation, letter or number, in the appropriate square. Note: The description of a complete relay must include both Model Number and Style Number.

STYLE IDENTIFICATION CHART:

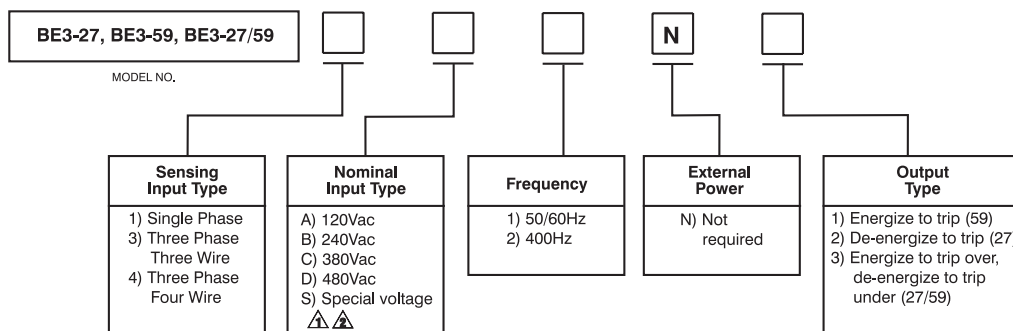

⚠ For other voltage applications, contact the factory.
 ⚠ Voltages are line to line.



P.A.E. Les Pins, 67319 Wasselonne Cedex FRANCE
 Tel +33 3.88.87.1010 Fax +33 3.88.87.0808
 e-mail: beifrance@basler.com

Route 143, Box 269, Highland, Illinois U.S.A. 62249
 Tel +1 618.654.2341 Fax +1 618.654.2351
 e-mail: info@basler.com

No. 1300 North Zhongshan Road, Wujiang Economic Development Zone
 Suzhou, Jiangsu Province, P.R. China 215200
 Tel +86(0)512 6346 1730 Fax +86(0)512 6346 1760
 e-mail: beichina@basler.com

www.basler.com

Printed in U.S.A.