

Silencer Selection



Call Silex for immediate assistance in selecting the appropriate silencer that best suits your application's acoustical and backpressure requirements or consult the silencer selection guide in our catalogue. You can also use Silex's exclusive Silencer Sizing and Selection Program "Silex Digital Engineer" found on the Company's secure website at www.silex.com.

Application & Performance

The critical grade Hockey Puck™ series are reactive silencers with good acoustical performance. Designed specifically for enclosures and marine applications where silencer height is critical. The silencer is manufactured from carbon steel, fully welded and finished with high temperature paint. 1/2" nominal diameter drain included.

Dimensions

Model	A	B	C	H	I	J	Wgt
HPCU-4	4	8.0 (203)	28 (711)	2 (51)	4 (102)	10.0 (254)	115 (52)
HPCU-5	5	8.5 (216)	32 (813)	2 (51)	4 (102)	10.5 (267)	142 (64)
HPCU-6	6	9.5 (241)	36 (914)	2 (51)	4 (102)	11.5 (292)	182 (83)
HPCU-8	8	11.0 (279)	46 (1168)	2 (51)	4 (102)	13.0 (330)	322 (146)
HPCU-10	10	14.0 (356)	50 (1270)	2 (51)	4 (102)	16.0 (406)	406 (184)
HPCU-12	12	18.0 (457)	60 (1524)	2 (51)	4 (102)	20.0 (508)	640 (290)
HPCU-14	14	21.0 (533)	68 (1727)	3 (76)	5 (127)	24.0 (610)	953 (432)
HPCU-16	16	23.0 (584)	76 (1930)	3 (76)	5 (127)	26.0 (660)	1187 (538)
HPCU-18	18	24.0 (610)	84 (2134)	3 (76)	5 (127)	27.0 (686)	1435 (651)
HPCU-20	20	26.0 (660)	94 (2388)	3 (76)	5 (127)	29.0 (737)	1708 (775)



* Distance from top of bracket to shell of silencer

Options

- 304, 316 or 316L stainless steel, Corten Steel
- Dual inlet or Custom inlet/outlet configurations
- Thermal insulation blankets to suit all configurations
- Mounting brackets available, top bracket (BT), bottom bracket (BB) & overtop bracket (BO)
- Flush mount inlet(s) (FMI) available

Metric dimensions rounded to nearest mm.

Dimensions and weights are nominal and may vary slightly in production models.

On silencers 4" and larger the inlet and outlet are flanged, manufactured from minimum 1/2" thick plate and drilled to ANSI class 150.



誥鑫企業有限公司
ARITH COMPANY LTD.
 地址：台北市復興北路427巷30號
 電話：(02)2717-5038
 傳真：(02)2717-5039
 e-mail: taipei@arith.com.tw
 網址： <http://www.arith.com.tw>




Lit-0004 07-10 a

HPCU Series

25 - 30 dBA

**Critical Grade
Uninsulated**

Typical Attenuation Curve

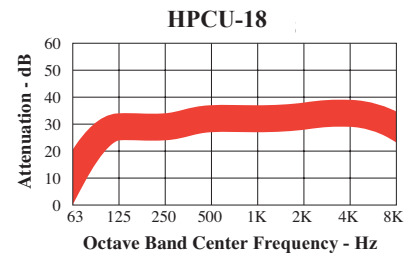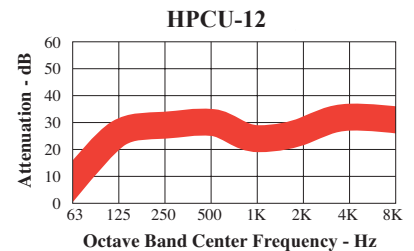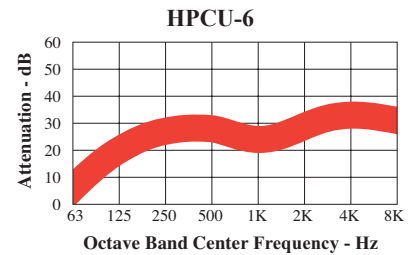

	Insulation Thickness	Thermal Performance**	Acoustic Performance	
Uninsulated	0"	N/A	Critical	12 - 30 dBA
			Super Critical	30 - 35 dBA
Cool*	1"	Good	Critical	25 - 32 dBA
			Super Critical	30 - 37 dBA
			Hospital	35 - 40 dBA
Cold*	2"	Superior	Critical	25 - 32 dBA
			Super Critical	30 - 37 dBA
Ice*	2"	Optimal	Critical	25 - 34 dBA
			Super Critical	30 - 38 dBA
			Hospital	30 - 42 dBA

*Insulated from top, bottom and all sides.

**Intended for heat reduction. Silex recommends insulation blankets for applications requiring personnel protection.

800 387 7818