# >> PFRV SERIES RECOVERY VESSEL

#### **FEATURES**

- Single bag units: fully constructed of 304 SS with swing type eye-bolt cover.
- Multi-bag units: Fusion bonded epoxy lined/polyester coated carbon steel vessel with hinged T-bolt cover.
- 150 psi working pressure (higher pressure ratings and ASME code available)
- Stainless steel support basket(s)
- 1/4" manual air bleed valve
- Pressure differential indicator
- One year limited warranty
- Options: Auxiliary alarm contact, plumbing package, 25/75/100 micron polyester collection bags.



#### **APPLICATION**

PUROFLUX's PFRV series recovery vessels are designed specifically to be used in conjunction with the PF60 series separators for the collection and disposal of separated solids and recovery of purged liquids.

#### **DESIGN**

The PFRV recovery vessels are designed to trap separated solids for ease of handling. The PFRV will reduce system fluid loss, clean-up time and large volumes of solid-liquid waste. Purged solids are continuously collected within the recovery vessel without interruption of the process system flow. Standard equipment includes a pressure differential indicator for indicating when a bag change is required. Bag changes are fast and simple with easy access covers.

### **RELIABILITY**

The PFRV series has a simple and reliable design which offers long lasting trouble free service. The simplicity of the PFRV recovery vessel warrants its use when solids collection and liquid recovery is required.

#### **SERVICE**

Technical field service representatives are available to provide guidance for application, installation and repair in both domestic and international markets.

#### **AFFORDABILITY**

PUROFLUX's PFRV recovery vessel when used in conjuction with the PF60 series separators offers an affordable alternative to other comparable types of filtration, and with its low initial investment, offers a quick return on investment.

PFRV/08



<mark>誥鑫企業有限公司</mark> ARITH COMPANY LTD.


也址:台北市 105 復興北路 427 巷 30 号


專真: (02)2717-5039

郵件:taipei@arith.com.tw 網址:www.arith.com.tw





## PFRV SERIES - Recovery Vessel



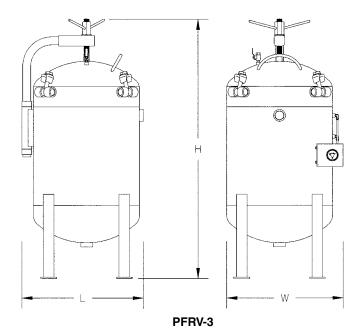

MODEL	SEPARATOR	PURGE FLOW	CONNECTION	VOLUME	DIN	DIMENSIONS		WEIGHT, LBS	
Number	Correlation	Rate	Size	Gallons	L	Н	W	Shipping	Oper.
PFRV-1S - II	1/2" - 3"	15 gpm	1" fpt	7	12"	33"	13"	50	135
PFRV-1T - II	4" - 8"	20 gpm	1" fpt	9	12"	47"	13"	61	175
PFRV-3S	10" - 14"	30 gpm	1 1/2" fpt	40	23"	48"	22"	325	655
PFRV-3T	16" - 20"	50 gpm	1 1/2" fpt	47	23"	60"	22"	350	745
Consult factory for larger sizes not shown.									

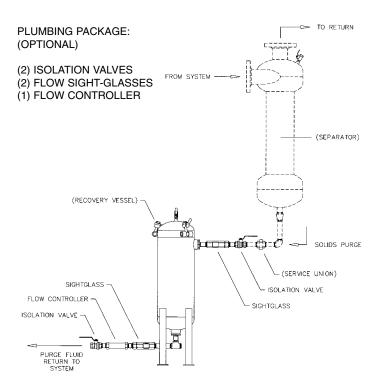




**AUXILIARY ALARM CONTACT:** (OPTIONAL)

- (1) PRESSURE DIFFERENTIAL **INDICATOR**
- (1) AUX. DRY CONTACT
- (1) NEMA 4X CONTROL BOX
- (1) 120 VOLT INDICATING LIGHT







: 台北市 105 復興北路 427 : (02)2717-5038 ( 代表號 ) : (02)2717-5039 : taipei@arith.com.tw www.arith.com.tw

